


High Frequency Magnet System

MH127 Series Kits

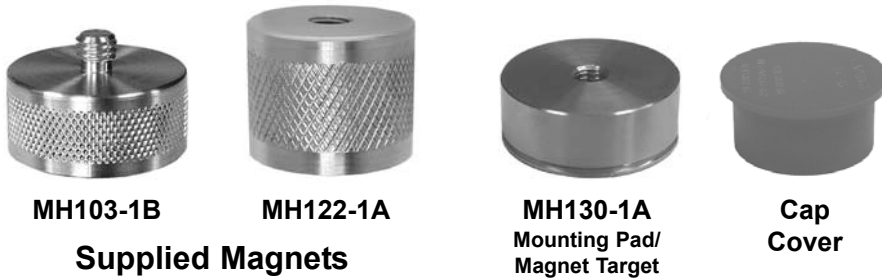

MH103-1B

MH122-1A

MH130-1A
Mounting Pad/
Magnet Target

Cap
Cover

Supplied Magnets

Component Specifications

Magnets	Pull Strength	50 lbs. (23 kg)
	Mounting Stud/Hole Dimensions (Height x Diam.)	1/4-28 MH103-1B/.420" x 1.00" OD (10,67 mm x 25,40 mm) MH122-1A/.665" x 1.00" OD (16,89 mm x 25,40 mm)
	Max. Operating Temperature	400° F (204° C)
Mounting Pad/Magnet Target	Material	17-4 SS
	Dimensions (Height x Diam.)	.380" x 1.00" OD (9,65 mm x 25,40 mm)
	Tapped Hole	1/4-28
	Top Surface Flatness Bottom Mounting Surface	.0005" (0,0127 mm) Abraded to accept adhesive
Cap Cover	Maximum Temperature	180° F (82° C)
	Color	Red
Adhesive (Loctite Depend)	Temperature Range	-60° to 250° F (-51° to 121° C)
	Components	Resin and Spray Activator
	Set Up Time	1 Minute
	Full Cure	24 Hours
System	Frequency Response	0-600,000 CPM (0-10,000 Hz)

Rare Earth Magnets

- Robust stainless steel case magnets make these units ideal for high volume route measurements.
- The use of a mounting target will enhance the accuracy of high frequency data, ensure consistent measurement locations, and repeatable trending data.
- The mounting target is supplied with a tapped hole, to allow the opportunity for permanently mounting an accelerometer, should it become necessary.
- Protective covers are supplied to keep paint and unwanted debris away from the mounting target.

Ordering Information for Kits

Kit Part Number	Magnets		Mounting Pad/Magnet w/ Protective Cover (Qty.)	Loctite Depend Adhesive Kit
	MH103-1B (Qty.)	MH122-1A (Qty.)		
MH127-2B	1	1	50	.85 oz. w/Activator
MH127-2C	1	1	100	Industrial Size w/Activator
MH127-2D	1	1	200	Industrial Size w/Activator
MH127-2E	1	1	300	Industrial Size w/Activator
MH127-2F	1	1	400	Industrial Size w/Activator
MH127-2G	1	1	500	Industrial Size w/Activator
MH127-2H	2	2	1000	(2) Industrial Size w/Activator

