

Probe Tips for Portable Measurements




CTC's **MH119** series probe tips connect directly to any standard 1/4-28 threaded accelerometer.

Each probe is made of tough 303 stainless steel to ensure long term survival in tough factory environments.

These probe tips allow easy access to measurement points that are between cooling fins, or in other difficult to reach areas.

| Part Number | Length (A) |
|-------------|--------------------|
| MH119-1A | 2.5 in. (63,5 mm) |
| MH119-2A | 4.0 in. (101,6 mm) |
| MH119-3A | 8.0 in. (203,2 mm) |

MH119 Series

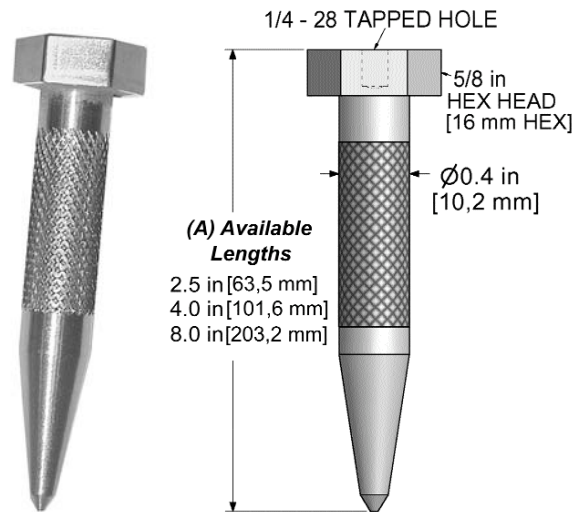

Zerk Grease Mounting Adapters



CTC's grease fitting adapters allow the accelerometer to be mounted directly into a grease fitting tapped hole and still allows for grease to be injected.


The fittings are available with 1/8" NPT or 1/4" NPT for most applications. If you have a sheet metal end bell on your motor that has a grease fitting coming out of it, you can save time on installation and mount an accelerometer on the adapter and still grease the bearing. This adapter can also be used where there is a pillow block with a grease fitting over the bearing.

Features

- 17-4 Stainless steel case material
- Magnet mount or permanent mount


MH134-1A

Zerk adapter mounting pad for accelerometers, 1/4" NPT mounting thread

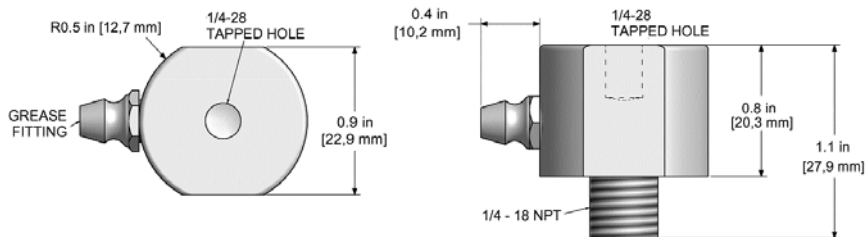

MH134-2A

Zerk adapter mounting pad for accelerometers, 1/8" NPT mounting thread

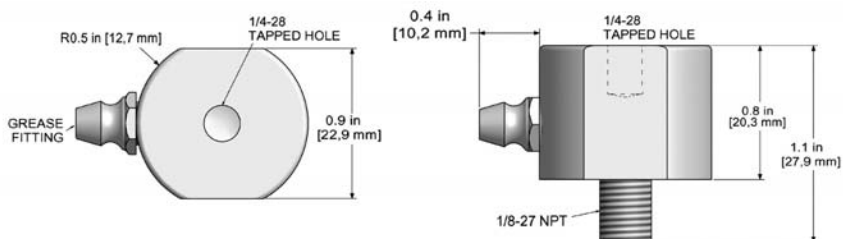

VIBRATION ANALYSIS HARDWARE